

 GZTECH	Specifications	Revision :	V1.2
	Pulsed solid-state laser	Date:	202503
	Model: S-60-532-N1	Page:	1/6

1. Optical characteristics

N	Characteristics	Parameter value	Unit
1	Central wavelength	532	nm
2	Maximum pulse energy	>1.2@50kHz	mJ
3	Output power	>60@50kHz	W
4	Frequency adjustment range	50 - 200	kHz
5	Pulse width	< 25@50kHz	ns
6	Output power instability	< 3%	RMS
7	Beam quality M ²	< 1.3	/
8	Spot roundness	> 90%	/
9	Polarization direction	Vertical	/
10	1/e ² beam diameter (Bare beam)	0.92 ± 0.1	mm
11	1/e ² beam diameter (6X)	5.6 ± 1	mm
12	Visual beam diameter (6X)	8.4 ± 1.5	mm
13	Bare beam divergence angle	< 2	mrad
14	Warm-up time	< 10	min






GZTECH

Specifications
Pulsed solid-state laser
Model: S-60-532-N1

Revision : V1.2
Date: 202503
Page: 2/6

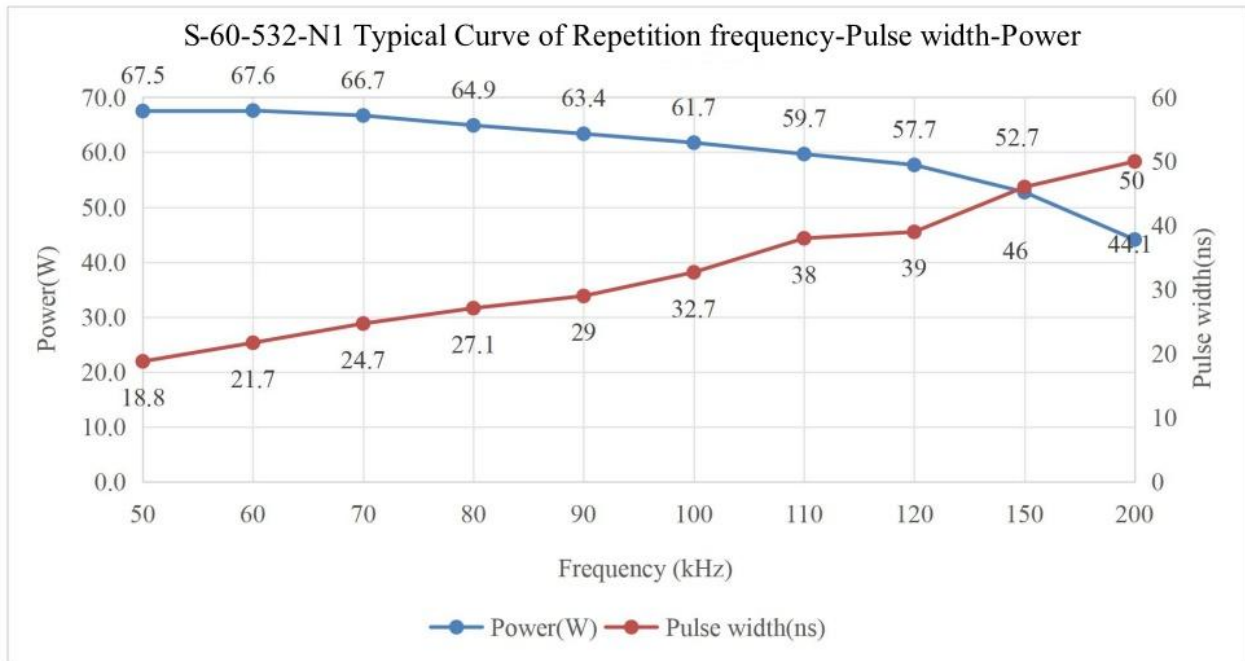

2. Electrical characteristics

N	Characteristics	Parameter value	Unit
1	Power supply voltage	48	VDC
2	Working current	< 12	A
3	Power consumption	< 576	W
4	Recommended power supply	≥ 800	W



 GZTECH	Specifications	Revision :	V1.2
	Pulsed solid-state laser	Date:	202503
	Model: S-60-532-N1	Page:	3/6

3. Environmental requirements

N	Characteristics	Parameter value	Unit
1	Ambient temperature	15 ~ 35	°C
2	Storage temperature	-10 ~ 50	°C
3	Ambient relative humidity	< 90 %	/



 GZTECH	Specifications	Revision :	V1.2
	Pulsed solid-state laser	Date:	202503
	Model: S-60-532-N1	Page:	4/6


4. Water cooler requirements

N	Characteristics	Parameter value	Unit
1	Cooling capacity	> 1000	W
2	Water flow	> 6	L/min
3	Water tank temperature control	25 ± 0.3	°C
4	Water pipe diameter	10	mm

5. Structural characteristics


N	Characteristics	Parameter value	Unit
1	Laser dimension (without feet and galvanometer adapter)	480*210*138	mm ³
2	Net weight	20.5 ± 0.3	kg

6. Dimension

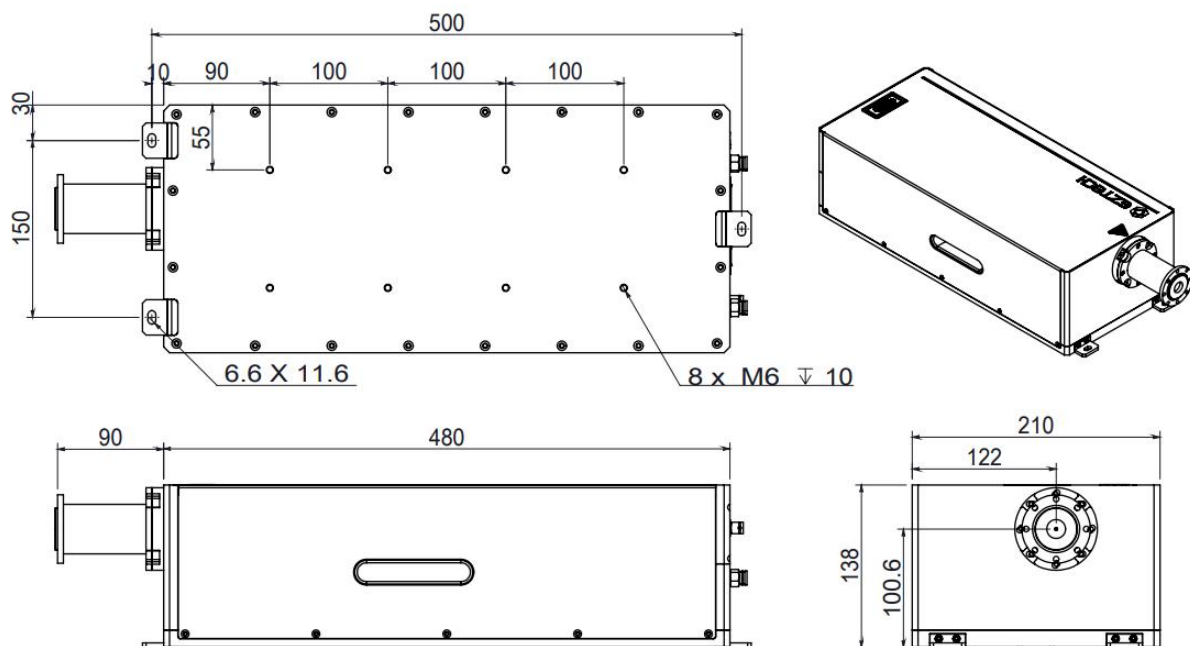

 GZTECH	Specifications	Revision :	V1.2
	Pulsed solid-state laser	Date:	202503
	Model: S-60-532-N1	Page:	6/6

9. Galvanometer connection tube

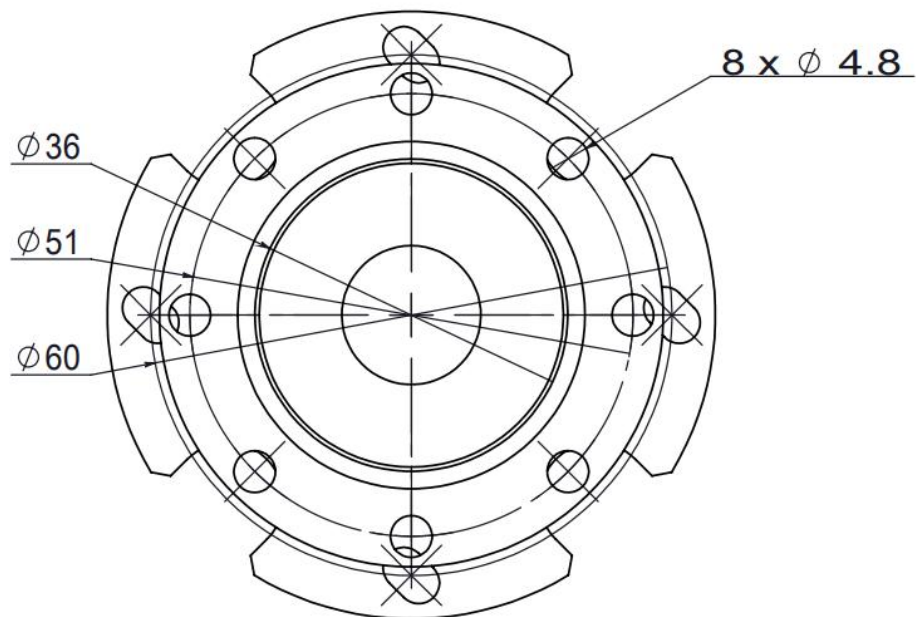

10. Galvanometer adapter

