

	Specifications	Revision:	V1.0
	QCW fiber laser	Date:	202503
	Model: YFQCW-300-SM3-050HA	Page:	1/3

1. Optical characteristics

N	Characteristics		Parameter value	Unit
1	Average power	CW	300	W
		Pulsed	300	W
2	Peak power		3000	W
3	Single pulse energy		30	J
4	Central wavelength		1080 ± 2	nm
5	Spectral width @3dB		< 5	nm
6	Power adjustment range		10 - 100	%
7	Maximum modulation frequency		5	kHz
8	Pulse width		0.02-50	ms
9	Laser switching ON/OFF time		< 25	μs
10	Output power instability (RMS)		< 2	%
11	Beam quality M ²		< 1.5	/
12	Polarization direction		Random	/
13	Indicator red light		Yes	/
14	QBH divergence angle (full angle)		< 130	mrad




	Specifications	Revision:	V1.0
	QCW fiber laser	Date:	202503
	Model: YFQCW-300-SM3-050HA	Page:	2/3


15	Delivery cable length	5	m
16	Power supply voltage	220	V
17	Operating current	<10	A
18	Power consumption	<800	W
19	Recommended power supply	>1800	W
20	Operating temperature	0-40	°C
21	Storage temperature	0-60	°C
22	Cooling method	Air cooling	/
23	Laser dimension	574*440*175	mm ³
24	Net weight	<50	kg
26	Core diameter	25	μm



	Specifications	Revision:	V1.0
	QCW fiber laser	Date:	202503
	Model: YFQCW-300-SM3-050HA	Page:	3/3

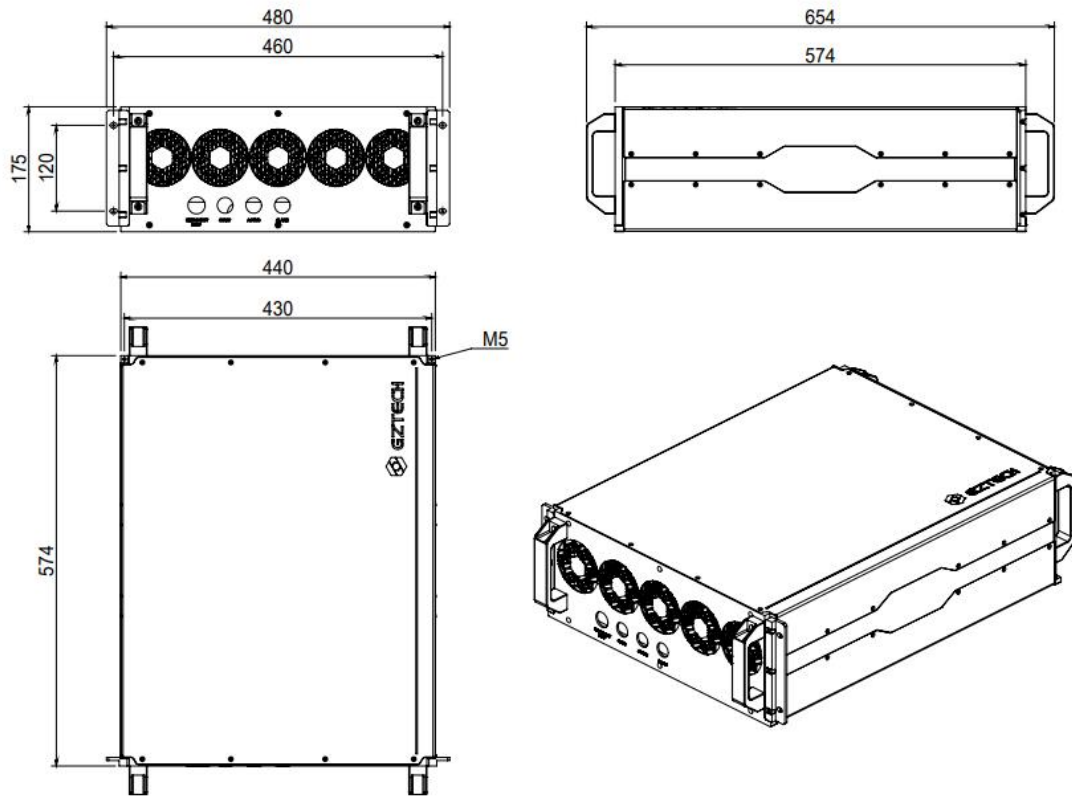

Laser dimension

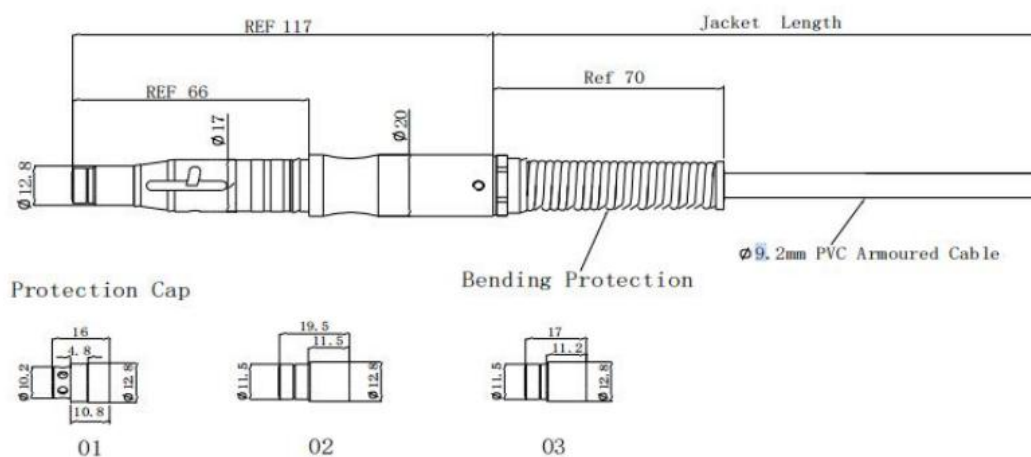

QBH dimension

